

NOTES:

1. PIN MAJOR DIAMETER MUST FIT 1/4 BORE ON PIN HOOK WRENCH.





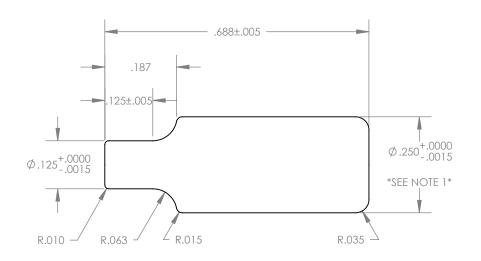

	ESS OTHE ENSIONS		PECIFIED: NCHES	TOLERANCES: X.XX= ±0.13	CTCRIT
	NAME	SIGN	DATE	$X.XXX = \pm 0.015$	
DRAWN	A.T.		11.06.19	X.XXXX= -0.0015	The Global Source for Stainle
APPV'D					

MATERIAL:

465 MAGNETIC S.S.

:

2-3/8" - 3-1/2" ADJUSTABLE HOOK WRENCH: 1/8" PIN

THIS DRAWING IS THE PROPERTY OF STERITOOL, INC. ANY REPRODUCTIONS OR MODIFICATIONS OF THIS DRAWING OR ITS CONTENTS WITHOUT THE CONSENT OF STERITOOL, INC. IS PROHIBITED.


PART NO. 10223_1/8" PIN


SCALE: 4:1 SHEET 1 OF 1

REV:

NOTES:

1. PIN MAJOR DIAMETER MUST FIT 1/4 BORE ON PIN HOOK WRENCH.



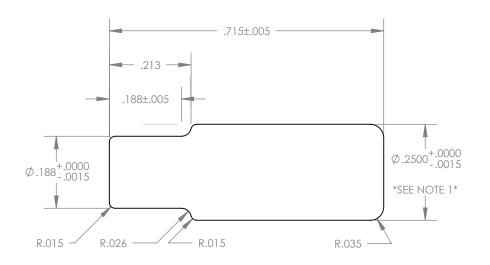

TOLERANCES:


UNLESS OTHERWISE SPECIFIED:




	DIMENSIONS ARE IN INCHES				$X.XX = \pm 0.13$			IM.
		NAME	SIGN	DATE	$X.XXX = \pm 0.015$			
L	DRAWN	A.T.		11.06.19	X.XXXX= -0.0015	The Global Sou	rce for Stainless Steel	Tools
	APPV'D							
	MATERIA	L:				TITLE:		
			465 M.	agnetic S.	S.	2-3/8" - 3-1/2" ADJU	STABLE HOOK WRENCH: 3/	16" PIN
	THIS DRAWING IS THE PROPERTY OF STERITOOL, INC. ANY REPRODUCTIONS OR MODIFICATIONS OF THIS DRAWING OR					PART NO. 10223	REV:	
ITS CONTENTS WITHOUT THE CONSENT OF STERITOOL, INC. IS PROHIBITED.					OF STERITOOL, INC. IS	SCALE: 4:1 SHEET I OF I		Α

NOTES:

1. PIN MAJOR DIAMETER MUST FIT 1/4 BORE ON PIN HOOK WRENCH.







UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES				TOLERANCES: X.XX= ±0.13	ST		Z <i>ITO</i> O	TM
	NAME	SIGN	DATE	$X.XXX = \pm 0.015$				_
DRAWN	A.T.		11.06.19	X.XXXX= -0.0015	The Global Source for Stainless Steel Tools			
APPV'D								
MATERIAL	:	465 M.	AGNETIC S.	S.	11TLE: 2-3/8" - 3-1/2" ADJUSTABLE HOOK WRENCH: 1/4" PIN			
REPRODUCTIONS OR MODIFICATIONS OF THIS DRAWING OR					PART NO.	10223_	1/4" PIN	REV:
ITS CON PROHIB		THOUT TH	E CONSENT (OF STERITOOL, INC. IS	SCALE: 4	:1	SHEET 1 OF 1	Α